


X-SCREED D60 dry screed machine - stage V 42kW - Radiator

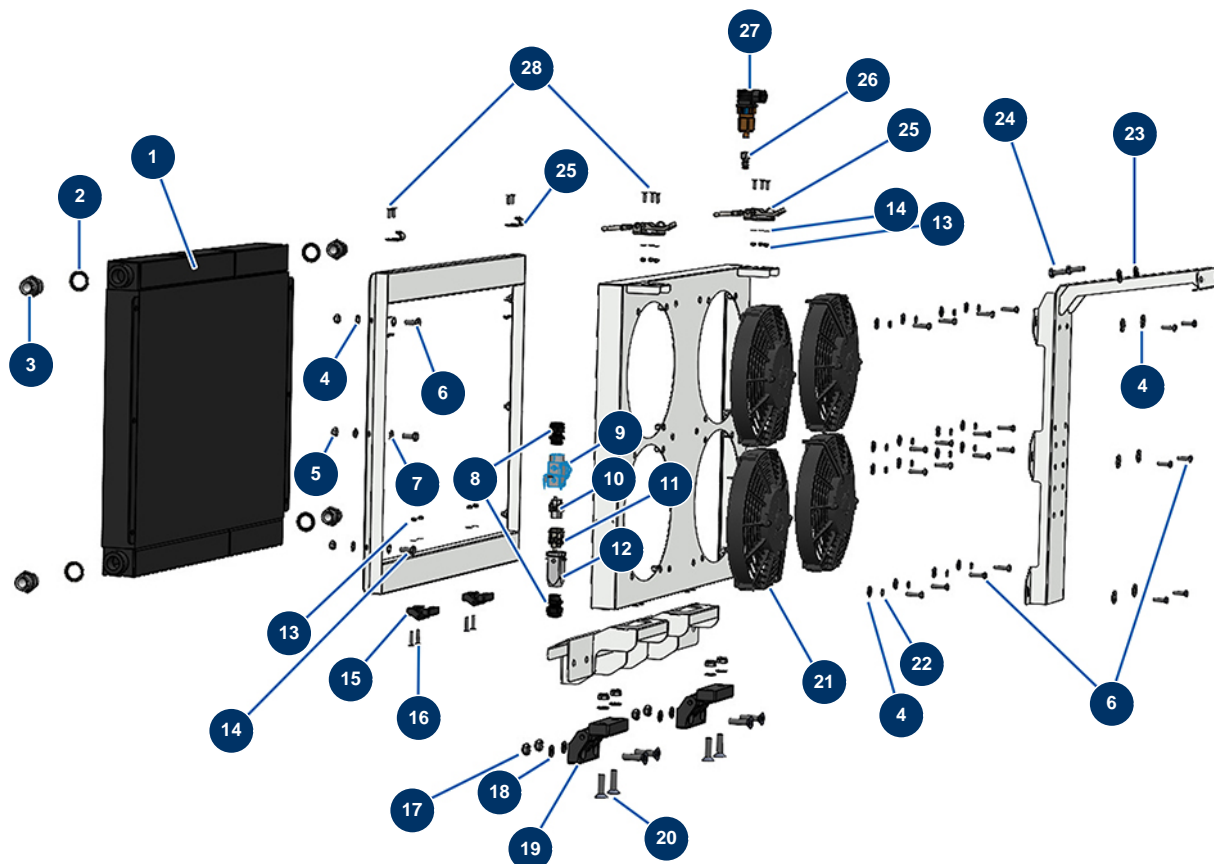

Détails des pièces

Pos.	Référence	Désignation
1	20698	1
2	12573	Steel gasket for 3/4" hollow screw with lip
3	90774	3/4" MaleD x 3/4" MaleD high-pressure nipple
4	30291	ø 6 large washer
5	20004	M 6 nylstop nut
6	14218	THEF 6 x 25 inox screw
7	70087	ø 6 inox narrow washer
8	11622	Black plastic packing M 20
9	20507	9
10	11914	Female insert 4p + G
11	11913	Blowing machine male insert 4 p + T
12	11916	Blowing machine insulating cover 3 p + T
13	11880	M 5 nylstop nut

Pos.	Référence	Désignation
14	70085	ø 5 narrow washer
15	13306	10 x 8 x 100 parallel key with round end
16	12135	16
17	60013	M 10 nylstop nut
18	30280	ø 10 inox narrow washer
19	12797	Hood hinge - C.P 60
20	14499	10 x 40 countersunk head screw
21	14655	21
22	80268	Grower washer Ø 6 - C.P 60
23	30292	ø 8 inox large washer
24	11544	THEF 8 x 25 screw
25	13111	Large hood locking adjustable locking clamp - C.P 60
26	20400	
27	20465	
28	90130	5 x 16 countersunk head screw