


Máquina de bombeo X-SCREED D60 - stage V 42kW - Chasis

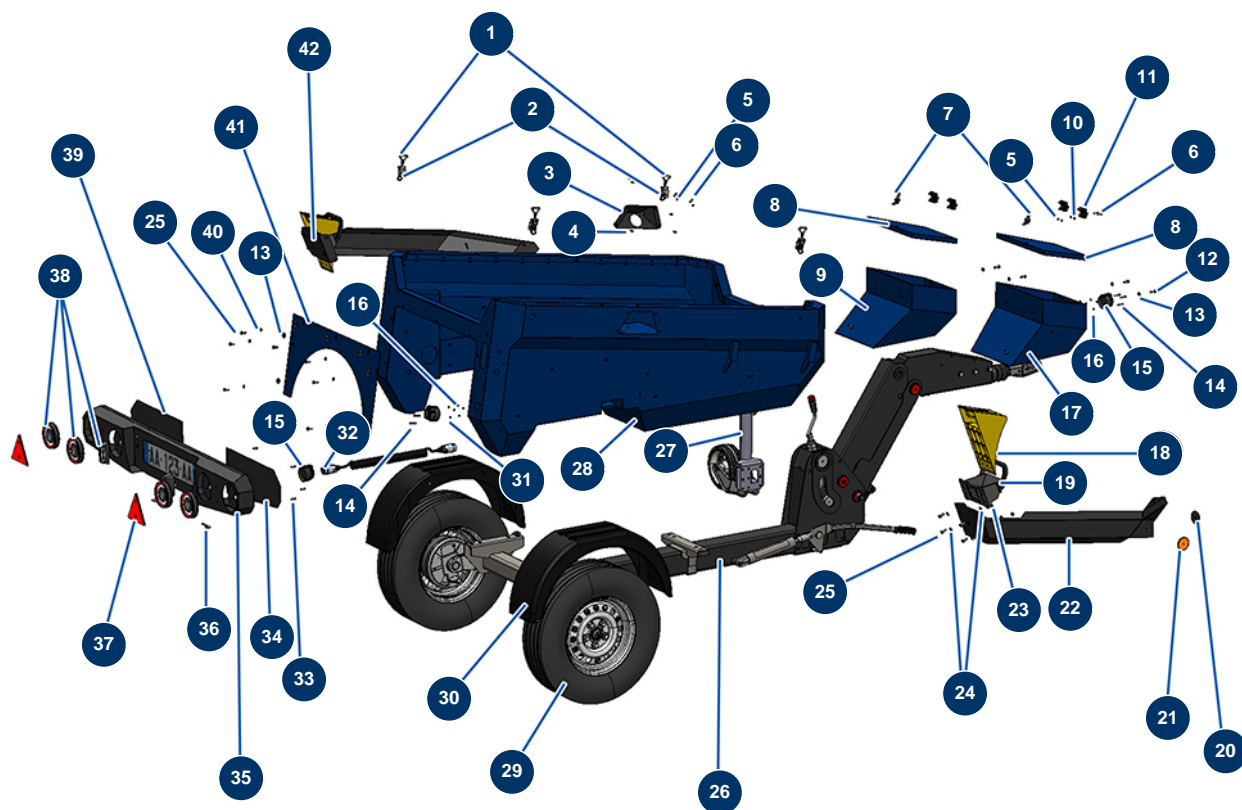

Détails des pièces

Pos.	Référence	Désignation
1	15021	Bisagra ajustable sin gancho
2	15022	Gancho de bisagra ajustable
3	C23221CST	
4	11145	Tornillo de cabeza cilíndrica redonda 6 x 16 inox
5	11880	Tuerca M 5 nylstop
6	12135	Tornillo de cabeza avellanada 5 x 20
7	13035	
8	C23171CST	
9	C23237	
10	30290	Arandela ancha ø 5
11	36036	11
12	11544	Tornillo THEF 8 x 25
13	30292	Arandela ancha ø 8 acero inoxidable

Pos.	Référence	Désignation
14	20375	Tornillo de cabeza cilíndrica 5 x 35
15	14913	
16	70086	Tuerca M 5 nylstop inox
17	C23170CST	
18	20213	Calzo de plástico amarillo X-PRO D140
19	20214	Soporte de calzo negro X-PRO
20	12362	Catadióptrico redondo y blanco - CP 60
21	12361	Catadióptrico redondo y naranja - CP 60
22	C23180CST	
23	90127	Tuerca M 8 nylstop
24	30256	Arandela estrecha ø 8 inox
25	30273	Tornillo THEF 8 x 20
26	30280	Arandela estrecha ø 10 inox
27	14171	
28	C23154CST	
29	30279	29
30	20212	Guardabarro de plástico X-PRO D200 y X-SCREED
31	70085	Arandela estrecha ø 5
32	14912	
33	20363	Tornillo de cabeza cilíndrica redonda 6 x 20
34	C23266CST	
35	C23158CST	
36	20046	Pasador R 4 mm
37	12360	Catadióptrico triangular rojo
38	20601	
39	C23159CST	
40	80269	Arandela grower ø 8
41	C30001	41
42	C23179CST	