


TWINMIX two-component dosing machine - Hardener machine

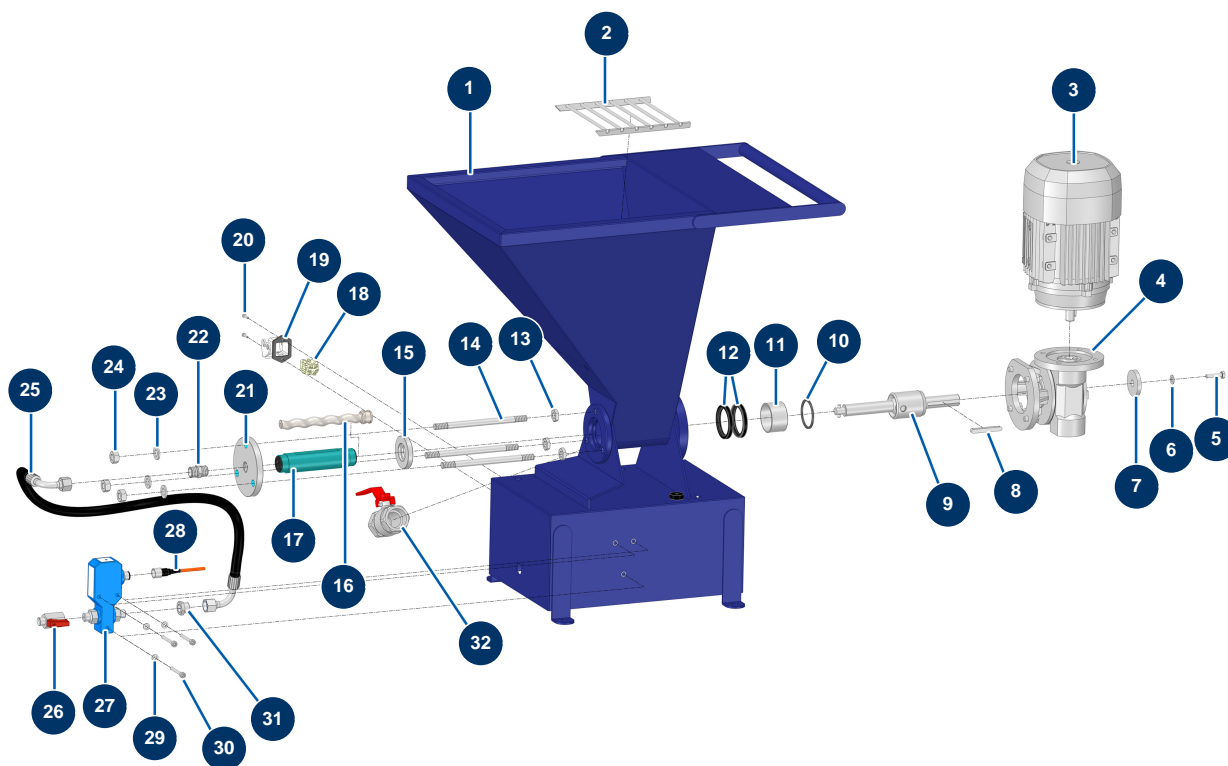

Détails des pièces

| Pos. | Référence | Désignation |
|------|-----------|--|
| 1 | C24039C | |
| 2 | C24041C | |
| 3 | 30008 | Electric motor 0,55 kW - T71 - B14 -1400 rpm - 400V |
| 4 | 30042 | Speed reducer 90° - T40 - R30 - B14/T71 |
| 5 | 14218 | THEF 6 x 25 inox screw |
| 6 | 80259 | Ø 6 medium washer |
| 7 | C22885 | |
| 8 | 90751 | 6 x 6 x 50 parallel key with round end for 4P |
| 9 | 15329 | Drive shaft for TWINMIX 4 P |
| 10 | 30351 | EUROPRO 4 P grease cage gasket |
| 11 | 60011 | EUROPRO 4 P grease cage |
| 12 | 70062 | Spi seal 40 x 52 x 7 for 4,6,8P, AG, MPE, 7000z, 9000z |
| 13 | 13979 | M10 flat inox nut |

| Pos. | Référence | Désignation |
|------|--------------|---|
| 14 | M10914 | |
| 15 | M10916 | |
| 16 | MI7009265200 | |
| 17 | MI3F00509800 | EUROPRO MAP 12 VITON pump stator RAL9005 |
| 18 | 11914 | Female insert 4p + G |
| 19 | 11915 | Blowing machine insulating support 3 p + T - 1 lever |
| 20 | 12249 | 3 x 12 cylindrical head screw |
| 21 | M10917 | |
| 22 | 30367 | 3/8" MaleC x 3/8" MaleC low-pressure nipple |
| 23 | 30280 | ø 10 inox narrow washer |
| 24 | 13978 | M10 inox nut |
| 25 | 15383 | |
| 26 | 30135 | 1/4" mini lux valve |
| 27 | 15322 | |
| 28 | 12409 | M12 straight female connector with 2m cable |
| 29 | 70085 | ø 5 narrow washer |
| 30 | 11881 | Sander head screw M5 x 40 |
| 31 | 90242 | 3/8" MaleC x 1/4" FemaleD low-pressure reduction |
| 32 | 70031 | Drain valve for EUROPRO 4-6-8-14 P, MPE, AG, 7000z, 9000z |