


MIXPRO 80 PREMIUM sequential mixer - Hydraulic circuit

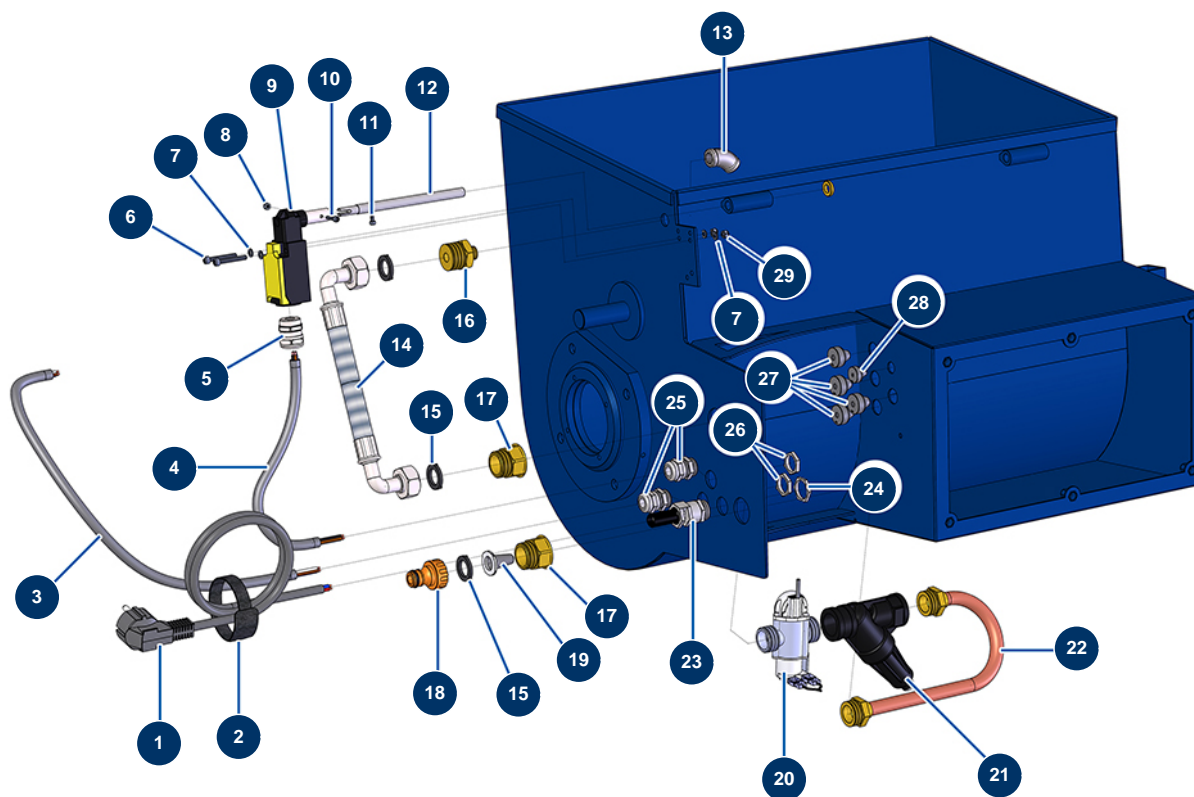

Détails des pièces

| Pos. | Référence | Désignation |
|------|-----------|---|
| 1 | 90180 | Supply cable with moulded plug 3G 1,5 mm ² |
| 2 | 12410 | Self-gripping collar with loop 12,7 x 228 mm |
| 3 | 90606 | Shielded cable 4 x 1,5 by the metre |
| 4 | 30018 | H07RNF 4G1.5 electrical cable by the metre |
| 5 | 80448 | M 20 waterproof cable gland |
| 6 | 11882 | 4 x 30 cylindrical head screw |
| 7 | 30267 | ø 4 inox narrow washer |
| 8 | 12737 | M 3 nylstop nut |
| 9 | 12742 | Version 2 CP mixer grid switch |
| 10 | 12250 | 3 x 16 cylindrical head screw |
| 11 | 13329 | 3 x 6 cylindrical head screw |
| 12 | 11500 | CP mixer grid switch hinge axle |
| 13 | 12104 | 45° inox low-pressure elbow FemaleD 1/4 x MaleD 1/4 |

| Pos. | Référence | Désignation |
|------|-----------|--|
| 14 | 12642 | COMPACT PRO IDEAL mixer supply hose |
| 15 | 11618 | 3/4" red fiber flat gasket |
| 16 | 12640 | 3/4" MaleD x 1/4" MaleD low-pressure nipple |
| 17 | 12562 | 3/4" MaleD x 3/4" FemaleD low-pressure nipple |
| 18 | 80124 | Inner threaded 3/4" quick connector |
| 19 | 80128 | Filter for 3/4" brass quick connector |
| 20 | 14979 | Flowmeter electrovalve 24VDC G1/2 |
| 21 | 12066 | Water pressure regulator 0.8 to 2.5 bar |
| 22 | C20583 | COMPACT-PRO mixer copper hose |
| 23 | 80450 | cable gland for 11mm supply cable |
| 24 | 30060 | 11mm cable gland nut |
| 25 | 30040 | Nickel plated watertight cable gland of 11 CEM |
| 26 | 30333 | Cable gland locknut of 11 CEM |
| 27 | 11564 | M 16 grey rubber cable gland |
| 28 | 11563 | M 12 grey rubber cable gland |
| 29 | 30266 | M 4 nylstop nut |