


TURBISOL 164/2 blowing machine - Chassis

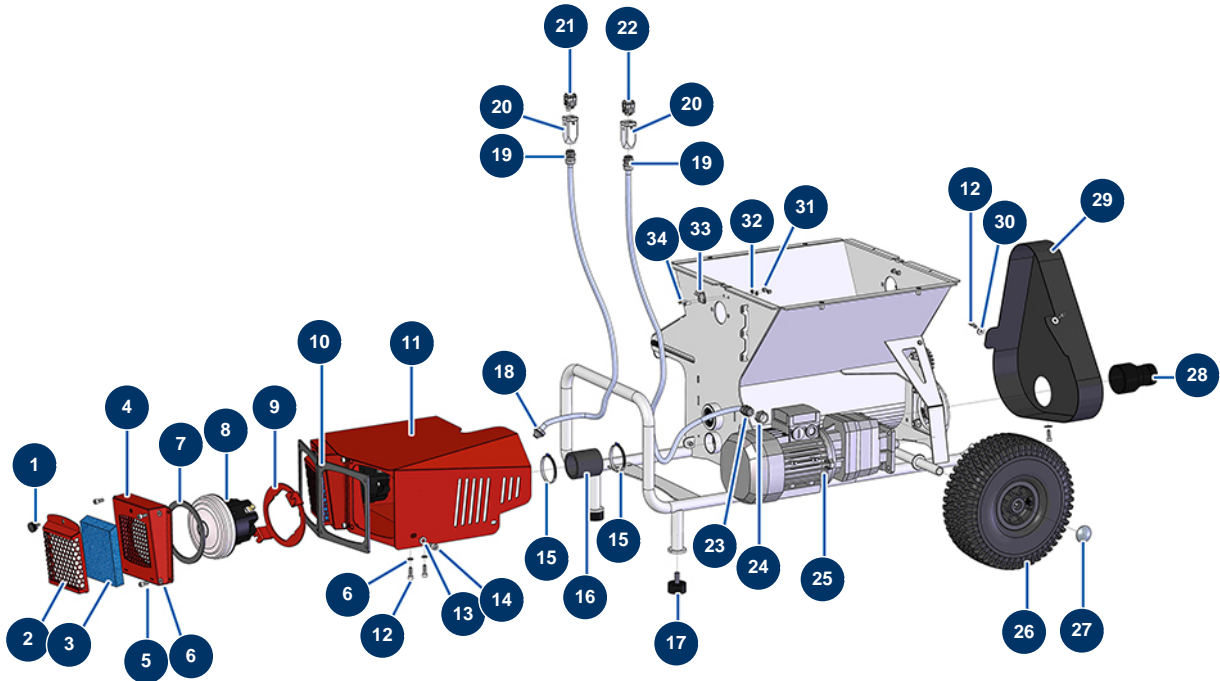

Détails des pièces

| Pos. | Référence | Désignation |
|------|-----------|---|
| 1 | 12261 | Ø22 M5 x 10 outer threaded plastic thumb wheel |
| 2 | C21971 | TURBISOL 164 foam filter holder |
| 3 | 13989 | TURBISOL 164 turbine foam filter |
| 4 | C21498 | Turbine door for TURBISOL 164/2 blowing machine |
| 5 | 80470 | 8 x 20 cylindrical head screw |
| 6 | 80259 | Ø 6 medium washer |
| 7 | 13537 | TURBISOL 164/2 turbine gasket |
| 8 | 13556 | 1-stage turbine - 230V |
| 9 | C21500 | Turbine flange for TURBISOL 164/2 |
| 10 | 13536 | Double turbine box gasket for TURBISOL 164/2 |
| 11 | C21494 | Air box for TURBISOL 164/2 blowing machine |
| 12 | 90996 | 6 x 20 inox cylindrical head screw |
| 13 | 80260 | ø 8 inox medium washer |

| Pos. | Référence | Désignation |
|------|-----------|---|
| 14 | 30295 | THEF 8 x 16 screw |
| 15 | 11752 | Worm gear clamp 50 x 70 x 9 |
| 16 | 12216 | Blowing machine hose Ø 48 x Length 75 mm |
| 17 | 30145 | Ø 40 x 20 M10 stop |
| 18 | 13632 | M 20 grey rubber cable gland |
| 19 | 30082 | Nickel plated watertight cable gland of 11 |
| 20 | 11916 | Blowing machine insulating cover 3 p + T |
| 21 | 11913 | Blowing machine male insert 4 p + T |
| 22 | 11911 | Blowing machine male insert 3 p + T |
| 23 | 30040 | Nickel plated watertight cable gland of 11 CEM |
| 24 | 80446 | Cable gland reduction M 25-11 |
| 25 | 12181 | Geared motor 0,75 kW - TC122 - R20,6 - 1400 rpm - 400V |
| 26 | 90692 | Complete wheel 300 shaft of 20 |
| 27 | 90282 | Ø25 chromed clip |
| 28 | M10154 | Ø 63-51 blowing machine outlet reduction |
| 29 | 12845 | TURBISOL 56 & 112 blowing machine pulley protective crankcase |
| 30 | 30293 | ø 10 inox large washer |
| 31 | 12737 | M 3 nylstop nut |
| 32 | 11737 | ø 5 inox medium washer |
| 33 | 13111 | Large hood locking adjustable locking clamp - C.P 60 |
| 34 | 90130 | 5 x 16 countersunk head screw |