


COMPACT-PRO 30 spraying machine - Transmission

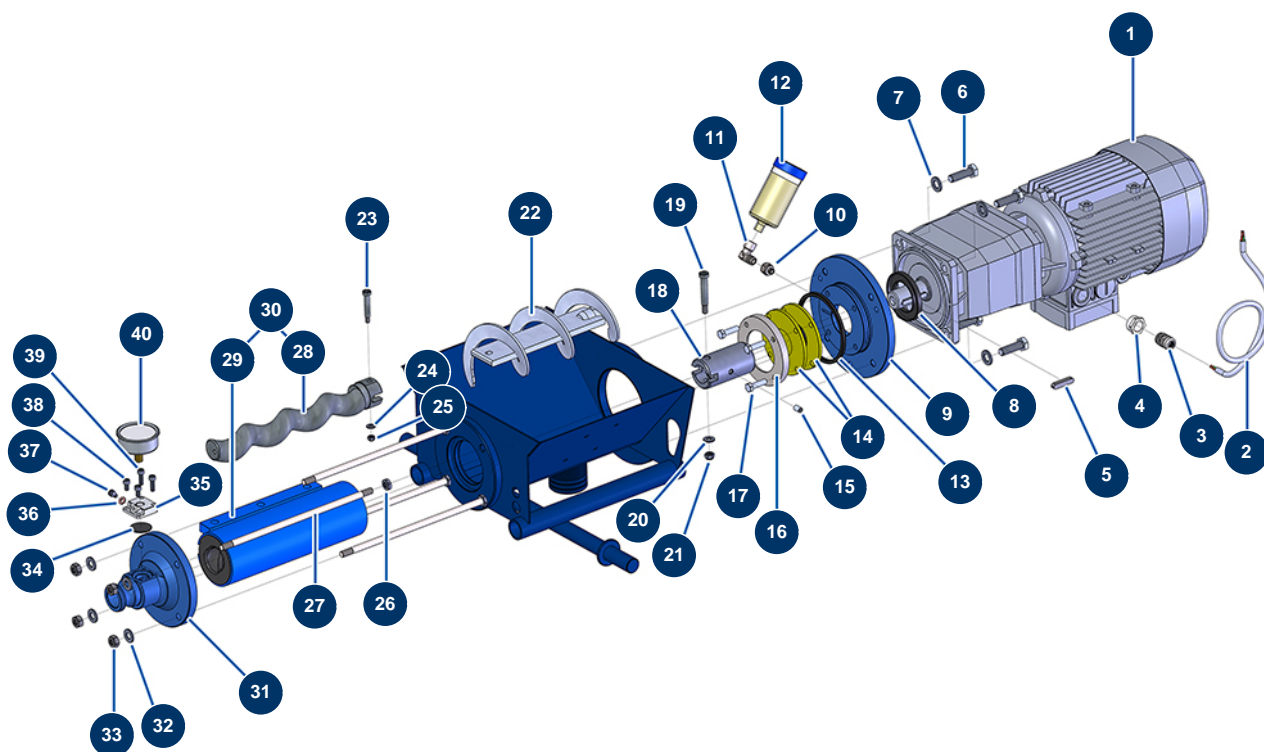

Détails des pièces

| Pos. | Référence | Désignation |
|------|-----------|---|
| 1 | 10895 | Geared motor 2,2 kW - T322 - R14 - 1400 rpm - 400V |
| 2 | 90606 | Shielded cable 4 x 1,5 by the metre |
| 3 | 30040 | Nickel plated watertight cable gland of 11 CEM |
| 4 | 80446 | Cable gland reduction M 25-11 |
| 5 | 11999 | 8 x 7 x 40 parallel key with round end |
| 6 | 12928 | THEF 12 x 40 screw |
| 7 | 30281 | ø 12 inox narrow washer |
| 8 | 70107 | Spi seal 50 x 80 x 8 for 24P,24PT, MPE300, COMPACT-PRO 30 |
| 9 | 11334 | Motor spacer flange for COMPACT-PRO |
| 10 | 10899 | 1/8" MaleD x 1/4" FemaleD low-pressure nipple |
| 11 | 30121 | 90° low-pressure elbow 1/4 MaleC x 1/4 FemaleD |
| 12 | 90639 | Automatic greaser |
| 13 | 11337 | COMPACT-PRO 30 4-lobes seal for motor spacer flange |

| Pos. | Référence | Désignation |
|------|--------------|---|
| 14 | 11300 | COMPACT-PRO 30 tank base gasket |
| 15 | 11360 | Socket head screw M 8 x 16 |
| 16 | M10190 | COMPACT-PRO 30 gasket support ring |
| 17 | 11544 | THEF 8 x 25 screw |
| 18 | 11336 | Drive shaft for CP 20, 30 & 40 |
| 19 | 11359 | CP 30 transmission shaft screw pin |
| 20 | 80260 | ø 8 inox medium washer |
| 21 | 13980 | M 8 nylstop inox nut |
| 22 | 11357 | CP 30 to 50 connecting rod |
| 23 | 90520 | CP 30 rotor screw pin |
| 24 | 80259 | Ø 6 medium washer |
| 25 | 14217 | M 6 nylstop inox nut |
| 26 | 13979 | M10 flat inox nut |
| 27 | 60010 | Fastening tie rod for MAP 5/6 |
| 28 | MI7009107300 | EUROPRO MAP 5/6 pump rotor CP30-type head |
| 29 | MI3F00529400 | EUROPRO MAP 6 D8-1,5 adjustable pump stator |
| 30 | 30446 | EUROPRO MAP 6 pump rotor/stator kit |
| 31 | 90125 | EUROPRO 24 P and COMPACT-PRO 30 stator flange |
| 32 | 80261 | ø 10 inox medium washer |
| 33 | 13978 | M10 inox nut |
| 34 | 12913 | Pump nose manometer membrane for JETPRO 80, 120, JETBAG 120 |
| 35 | M10079 | MIXPRO 14 cage cover |
| 36 | 12765 | Copper seal for JETPRO 80 pump nose |
| 37 | 90157 | M6 x 16 cylindrical head screw - CP 60 |
| 38 | 12112 | 6 x 12 cylindrical head screw |
| 39 | 90996 | 6 x 20 inox cylindrical head screw |
| 40 | 80070 | Axial manometer 1/4" conical oil 50 mm 0 to 60 bar |